PRE-FAB 32"X06"

12 MM THICKNESS (1/2" THICK)

MULTIPURPOSE
SOLUTION FOR
RESIDENTIAL AND
COMMERCIAL
SPACES.



MILE®stone's PRE-FAB 32"x96" product range offers solutions for versatile paneling, suitable for a wide range of interior and exterior applications. Crafted with precision and durability in mind, these oversized porcelain tiles redefine functionality and aesthetics.

MILE®stone's PRE-FAB, offered in a 32"x96" size, provides multipurpose solutions for various applications in residential and commercial spaces.

REDEFINING FUNCTIONALITY AND AESTHETICS.

A WORLD OF **DESIGN**POSSIBILITIES.



Why choose PRE-FAB?

- Quick and easy installation minimal tools required.
- Lightweight and portable easy to handle and transport.
- Versatile great for countertops, showers, and custom furniture.
- Perfect DIY option ideal for fast and affordable remodelling.
- Eco-friendly and sustainable an environmentally responsible solution.







Wall imprint_48″x110″_Underglazed_Ombre_Warm_Matte Table imprint_Pre-Fab_32″x96″_Intaglio_Kaolin_Matte Floor imprint_24″x24″_Intaglio_Cool_Matte






PRE-FAB 32"x96" porcelain tiles offer unmatched versatility. Their 12mm (1/2") thickness and rectified size ensures durability during fabricaiton, and strength for handling and shipping with confidence.

Resistant to mold, mildew, stains, UV, weather, and wear, these porcelain tiles are ideal for indoor and outdoor use. Combining innovation, durability, and design flexibility, MILE*stone's PRE-FAB material opens up endless possibilities for stylish, functional spaces.



PRE-FAB 32"X96"
ELEVATES INTERIOR
AND EXTERIOR DESIGN
POSSIBILITIES.



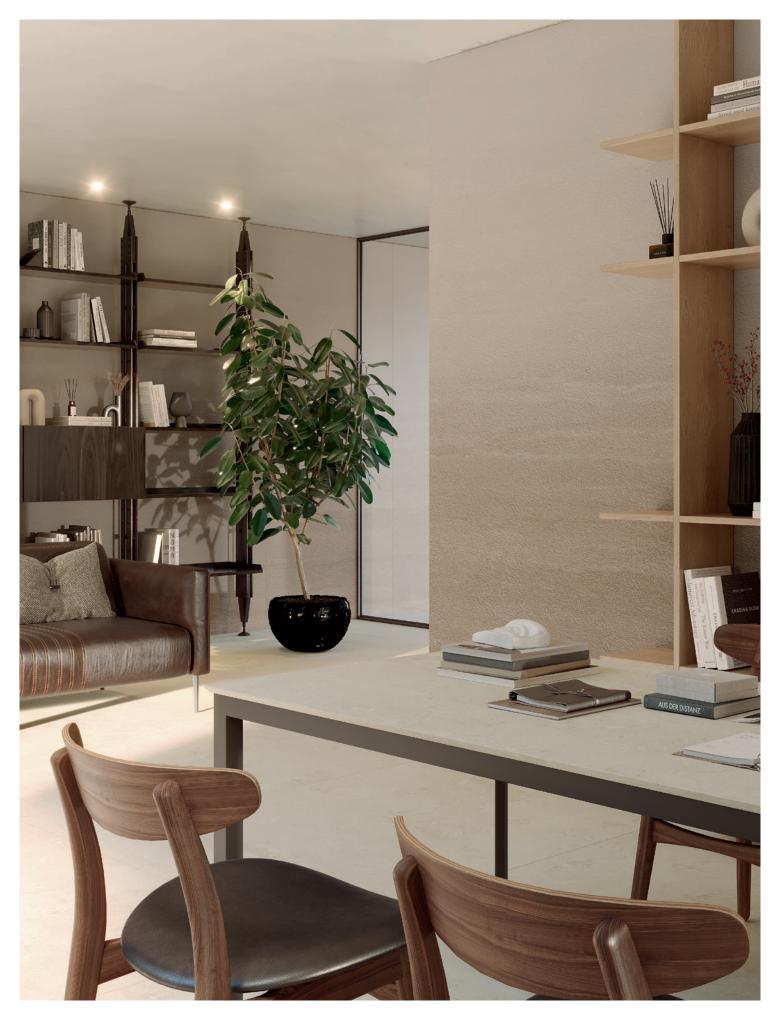



Wall imprint_48″x110″_Underglazed_Ombre_Warm_Matte Table Ecostone_Pre-Fab_32″x96″_Sharknose_Jute_Cross_Cut_Matte Floor Ecostone_48″x48″_Jute_Cross_Cut_Matte





Wall Farmhouse_Living_48″x110″_Millstone_Matte Table Jem_Pre-Fab_32″x96″_Sharknose_Adagio_White_Matte Floor Farmhouse_Living_24″x24″_Slate_2CM



Wall Farmhouse_Living_Pre-Fab_32″x96″_Millstone_Matte Vanity Farmhouse_Living_Pre-Fab_32″x96″_Sharknose_Millstone_Matte Floor Farmhouse_Living_48″x48″_Millstone_Matte





IDEAL FOR COUNTERTOPS AND SURFACES, ASSURING DURABILITY, STAIN, AND CHEMICAL RESISTANCE.

Countertop Ecostone_Pre-Fab_32"x96"_Sharknose_Jute_Cross_Cut_Matte Floor Imprint_Intaglio_24"x48"_Kaolin_Matte



JEM ADAGIO WHITE

22

JEM ARIA GOLD

Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

1105112 Matte rectified

1105198 Sharknose Matte rectified



Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

1105113 Matte rectified

1105199 Sharknose Matte rectified

1105205 Polished rectified

1105206 Sharknose Polished rectified

12mm

ECOSTONE FOSSIL CROSS CUT

Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

1105109 Matte rectified

1105195 Sharknose Matte rectified



Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

> 1105110 Matte rectified

1105196 Sharknose Matte rectified 12mm

ECOSTONE JUTE CROSS CUT



26


IMPRINT KAOLIN

Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

> 1105111 Matte rectified

1105197 Sharknose Matte rectified

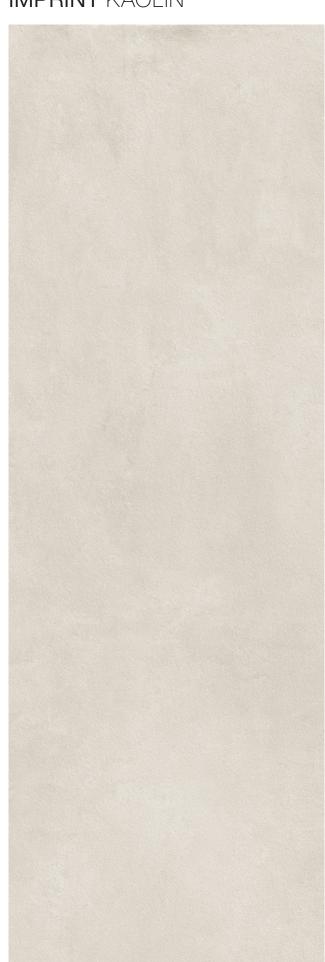

Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

> 1105101 Matte rectified

1105194 Sharknose Matte rectified



Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

> 1105114 Matte rectified

1105200 Sharknose Matte rectified



Size and finishes

32"x96" 12 mm thickness (1/2 inch thick)

> 1105115 Matte rectified

1105201 Sharknose Matte rectified

Colors & Sizes

Colors	32"x96"	32"x96" Sharknose
ADAGIO WHITE - JEM	Matte 1105112	Matte 1105198
	Matte 1105113	Matte 1105199
ARIA GOLD - JEM	Polished 1105205	Polished 1105206
FOG CROSS CUT - ECOSTONE	Matte 1105109	Matte 1105195
KAOLIN - IMPRINT	Matte 1105101	Matte 1105194
ALABASTER - FARMHOUSE LIVING	Matte 1105114	Matte 1105200
JUTE CROSS CUT - ECOSTONE	Matte 1105111	Matte 1105197
FOSSIL CROSS CUT - ECOSTONE	Matte 1105110	Matte 1105196
MILLSTONE - FARMHOUSE LIVING	Matte 1105115	Matte 1105201

Colors shown may vary from actual product. Final selection should be made from actual product samples.

Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3. Este product cumple o exceed todos los estandares de ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
*	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
^	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
*	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
*	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
<u>Å</u>	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
**	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40% Rectified	
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40% Rectified	
H	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25% Rectified	
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated	
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated	
H	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50% Calibrated	
ı	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

⁻ Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

Green Certifications & Accreditations

DESCRIPTION



Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our



The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.



Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.



Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.



Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold



Defines post-consumer content of as much as 3% recycled material which reduces landfill impact. Certified by Bureau Veritas.



Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint. Certified by Bureau Veritas.



Florim USA's sustainability and social practices support the mission of The International Living LIVING FUTURE | Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community



USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification



Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon



Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.



The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020



ISO 9001 & ISO 14001 are globally recognized standards. ISO 9001 certifies that Florim USA products and practices continually meet and exceed customer and regulatory requirements. ISO 14001 certifies that Florim USA complies with environmental regulations and that it's manufacturing practices are environmentally

BENEFIT CORPORATION

Florim USA updated its corporate charter in 2022 to become a Benefit Corporation. Our company is committed to maintaining this designation through initiatives focused on sustainability, social responsibility, ethical business practices and transparent, annual reporting on our social and environmental performance.

Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices.

Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500mile radius of factory) resulting in low transportation related carbon emissions.

MILE®stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality.



