
LUXURY









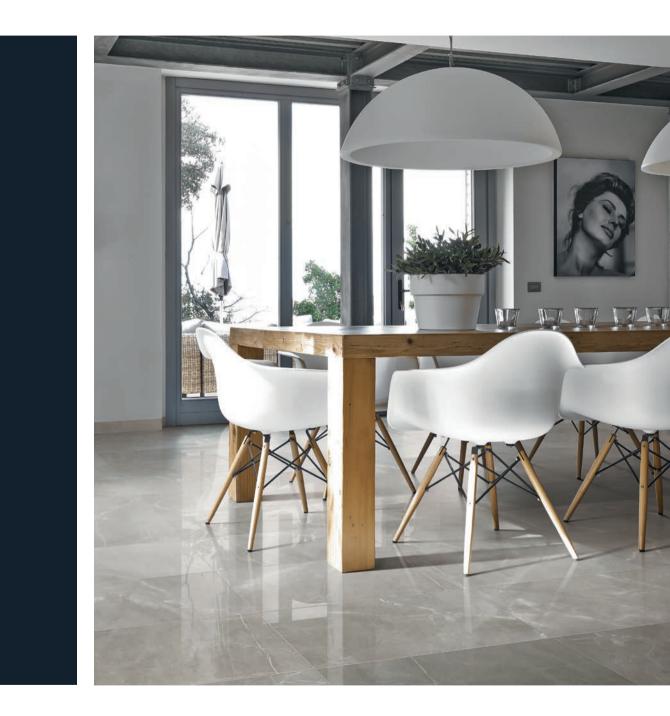

LUXURY/ COLOR BODY PORCELAIN MADE IN THE USA.

2 **LUXURY**

Luxury, by Milestone, embodies the idea of a fresh and flawless look on porcelain tile.



LUXURY / AMANI GREY




This collection was created to capture a timeless look in your residential or commercial space. The classic color options mixed with a **contemporary touch** provide an aesthetically pleasing & design driven look.






LUXURY / CALACATTA

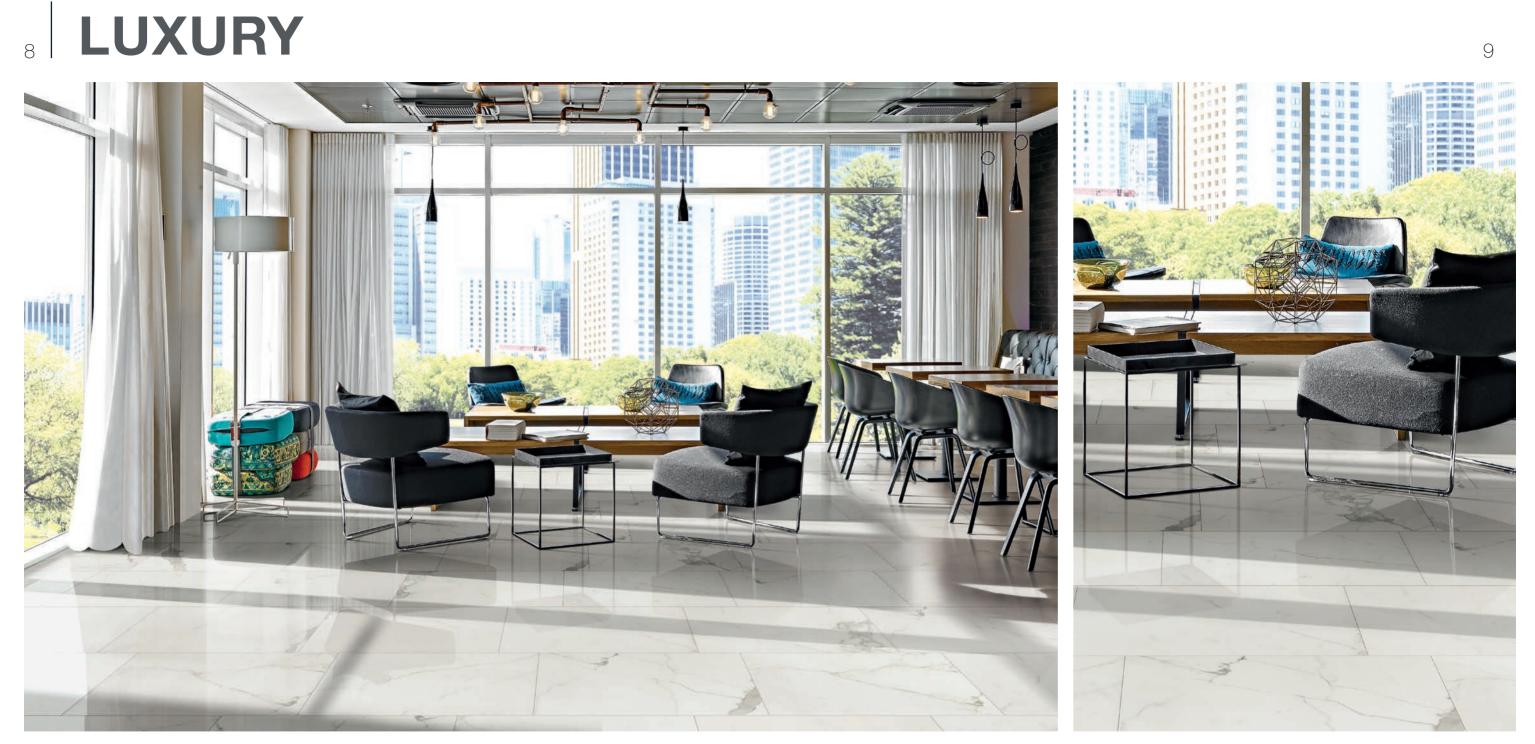





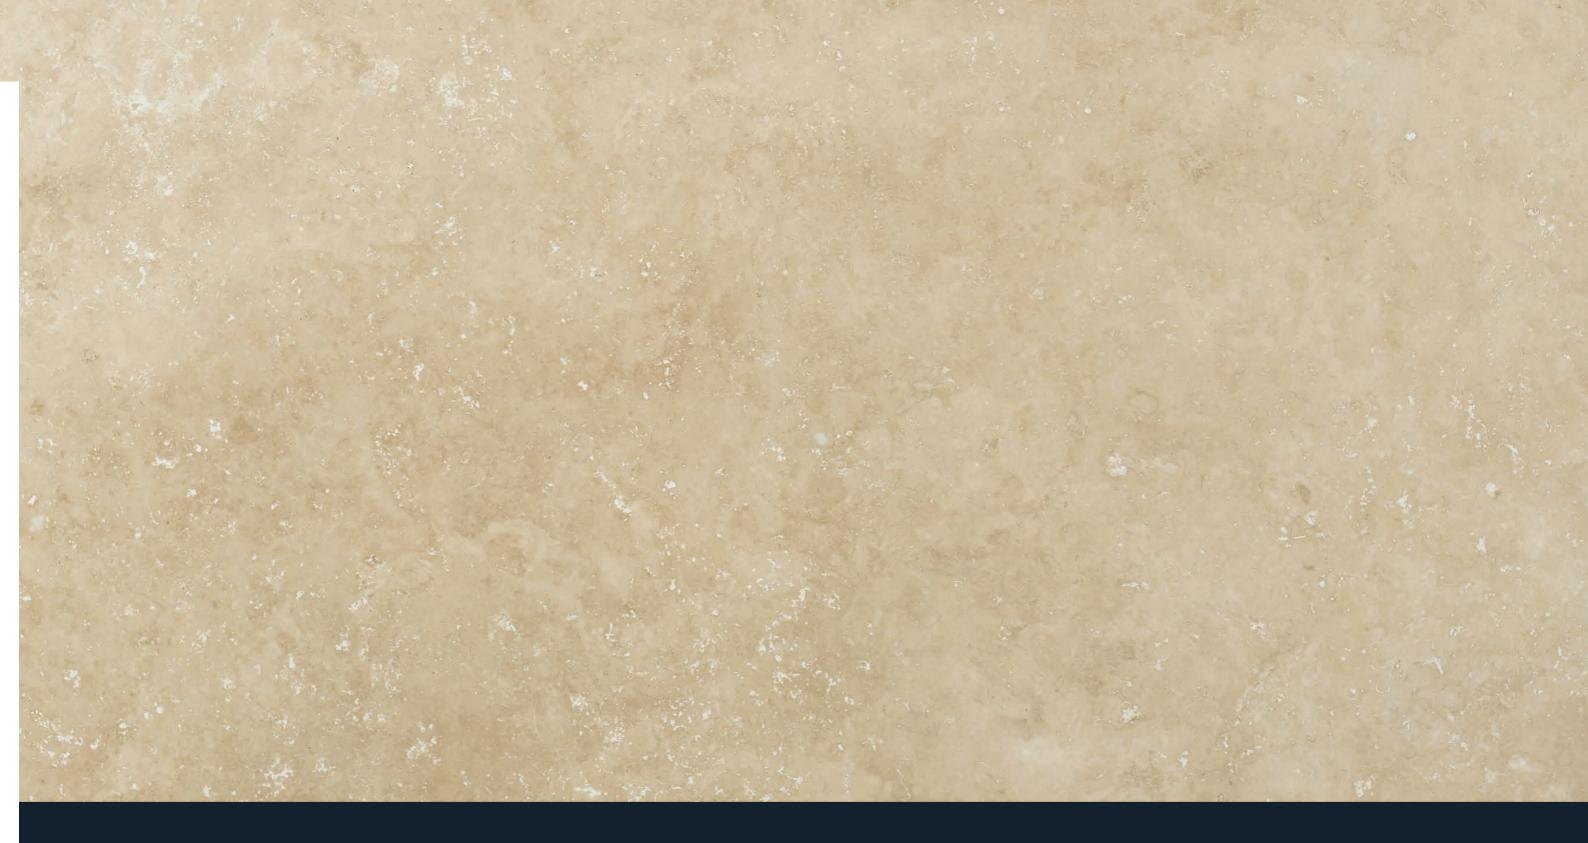



LUXURY / MARFIL

14 LUXURY







12"x24". 24"x24" / MARFIL

Marfil's warm inviting hues are the embodiment of style & sophistication. Bringing a coziness to what could otherwise be a cold commercial space.



12"x24". 24"x24"/I MARFIL







LUXURY / AMANI GREY












Luxury's Amani Grey is easily the most versatile color in the collection. The neutrality of this warm gray brings it effortlessly into any design scheme.

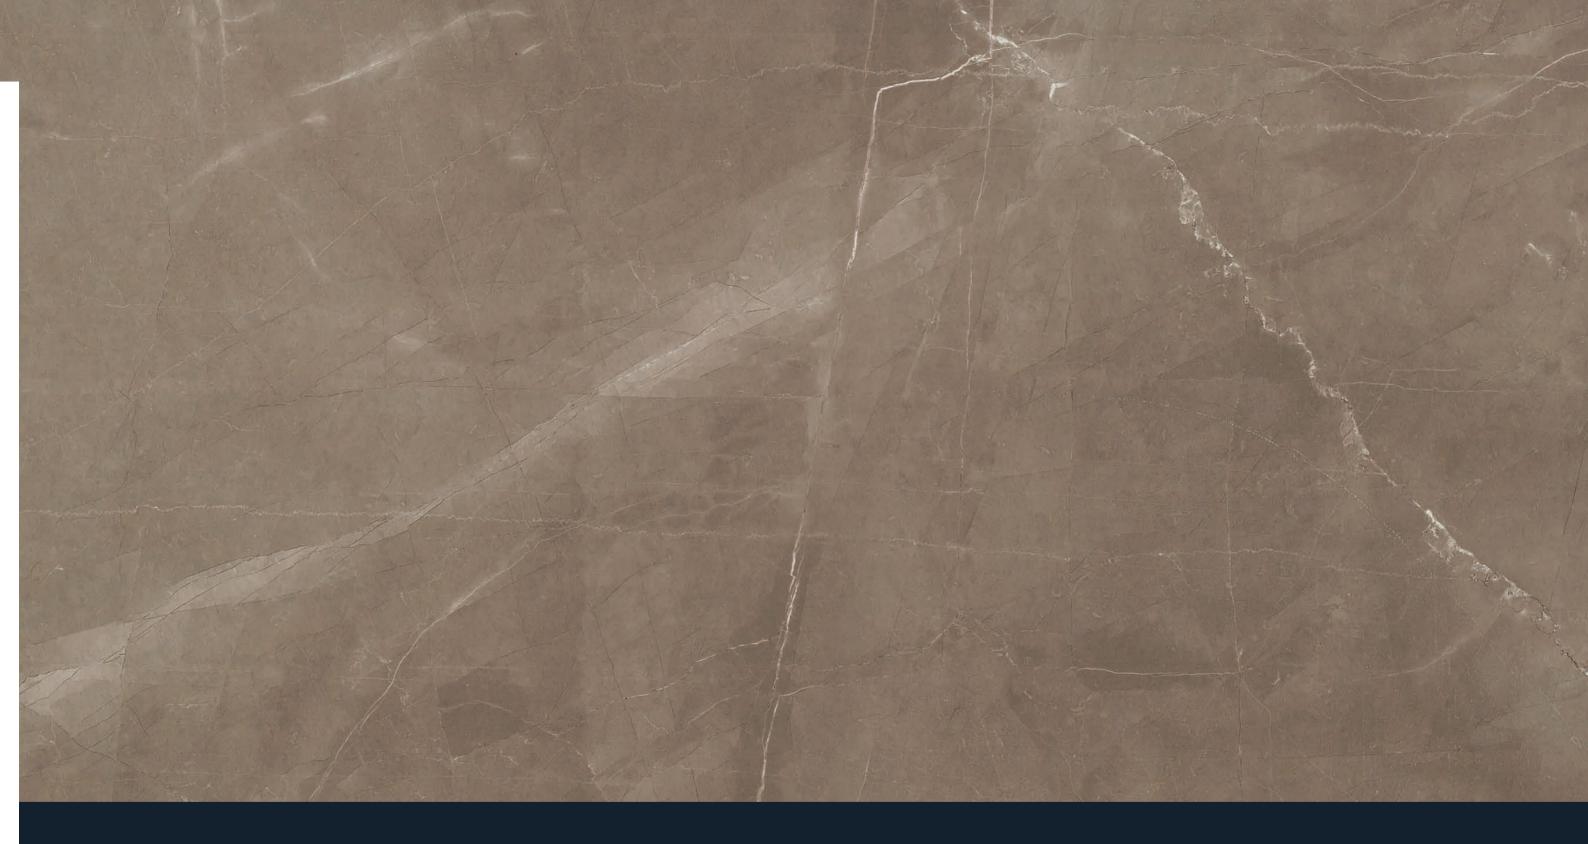



LUXURY / AMANI BRONZE












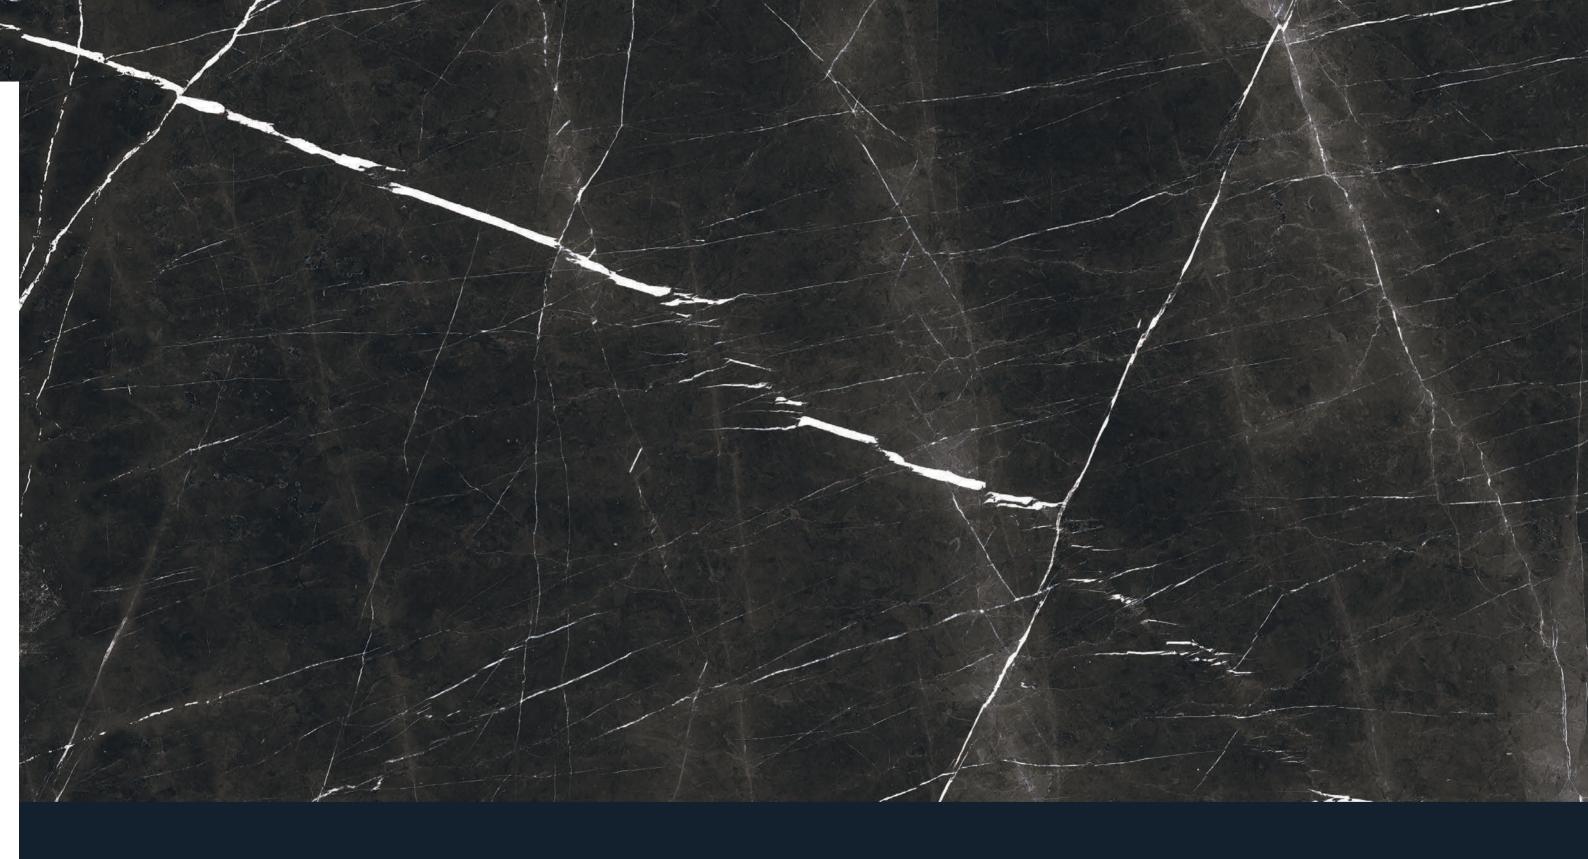

LUXURY / NERO MARQUINA














SIZES & SHADE VARIATION

sizes:

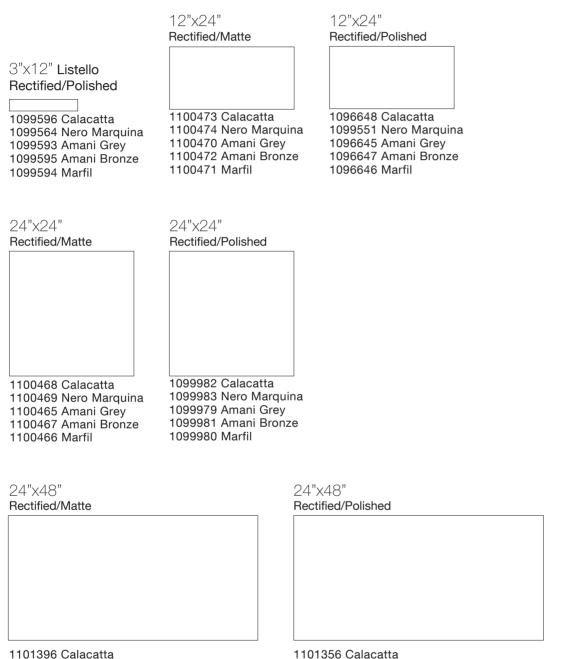

1101356 Calacatta 1101390 Nero Marquina 1101325 Amani Grey 1101384 Amani Bronze 1101387 Marfil

mosaics & trim pieces:

9"×11" Hexagon Mosaic (12 dot)



1099587 Calacatta 1099565 Nero Marquina 1099584 Amani Grey 1099586 Amani Bronze 1099585 Marfil

3"x12" Bullnose

1099926

1099583 Calacatta 1099563 Nero Marquina 1099580 Amani Grey 1099582 Amani Bronze 1099581 Marfil 1099926 Calacatta 1099927 Nero Marquina 1099923 Amani Grey 1099925 Amani Bronze 1099924 Marfil

3"x12" Bullnose Polished

9"x11" Hexagon Mosaic

1099591 Calacatta

1099589 Marfil

1099566 Nero Marquina

1099590 Amani Bronze

1099588 Amani Grey

(12 dot) Rectified/Polished

Colors shown may vary from actual product. Final selection should be made from actual product samples.

1101402 Nero Marquina

1101393 Amani Bronze

1101322 Amani Grey

1101399 Marfil



UNIFORM APPEARANCE Differences among pieces from the same production run are minimal.



Clearly distinguishable differences in texture and/ or pattern with similar colors.



While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



SUBSTANTIAL VARIATION Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.





Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3. Este product cumple o exceed todos los estandares de ANSI A137.1 & A137.3.

		SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone	VALUES
		WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	*	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	AL RESIDENTIAL /	_
-	•	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFF	ECTED
-	×		ANSI	INDOOR ≥0.42 WET	≥0.42	WET
_		D.C.O.F. AcuTest®	A326.3	OUTDOOR >0.55 WET	>0.55 WET 2	CM & GRIP
	×	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
		BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200	lbf
	ڡ۫	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300	lbf
		BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500) lbf
-	**	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESIST	FANT .
		WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
-		WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
-		WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
-		WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
-		WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
-	H	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
-	ī	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04	4 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.

INDUSTRY STANDARD

Green Memberships & Accreditations

	DESCRIPTION
Red List Free Declare.	Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.
hpJ VERSION 2.0	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
THE INTERNATIONAL EPD* SYSTEM	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
CECEVCLARD THE CONTRACT OF THE CONTRACT.	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
Son Consumer	Defines post-consumer content of as much as 3% recycled material which reduces landfill impact. Certified by Bureau Veritas.
Recycled Const	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint. Certified by Bureau Veritas.
INTERNATIONAL LIVING FUTURE INSTITUTE	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
A LEW BER	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
TILE COUNCIL OF NORTH AMERICA, INC.	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.
BO 9001 Outly Notes Systems CERTIFIED CERTIFIED CERTIFIED	ISO 9001 & ISO 14001 are globally recognized standards. ISO 9001 certifies that Florim USA products and practices continually meet and exceed customer and regulatory requirements. ISO 14001 certifies that Florim USA complies with environmental regulations and that it's manufacturing practices are environmentally conscious.
BENEFIT	Florim USA updated its corporate charter in 2022 to become a Benefit Corporation. Our company is committed to maintaining this designation through initiatives focused on sustainability, social responsibility, ethical business practices and transparent, annual reporting on our social and environmental performance.

Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE[®] stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- · Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE[®] stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality.







300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461



8700519 v. 01/24