

RUSTIC STONE



RUSTIC STONE



RUSTIC STONE / WHITE p.6



RUSTIC STONE / TAUPE p.12



RUSTIC STONE / GREY p.16



RUSTIC STONE / CHARCOAL p.22

colors

RUSTIC STONE / WHITE



RUSTIC STONE / TAUPE



RUSTIC STONE / GREY



RUSTIC STONE / CHARCOAL



RUSTIC STONE

The desire to combine and fashion a contemporary, yet classic stone-look tile propelled us forth in creating Rustic Stone.

Aesthetically we aimed to pay reverence toward the striking and present neo-industrial cement-look, combined with a rural natural stone expression. Simply, we've designed a modern reinterpretation of a rustic stone floor – with a twist.




RUSTIC STONE

Our efforts have birthed a collection suitable for both countryside and city. Rustic Stone is comprised of 40% recycled content, is made from locally sourced, natural materials and contains no VOCs, PVC or Formaldehyde. Available in four designer colors, Rustic Stone also includes mosaic and trim options



RUSTIC STONE / **WHITE**

RUSTIC STONE

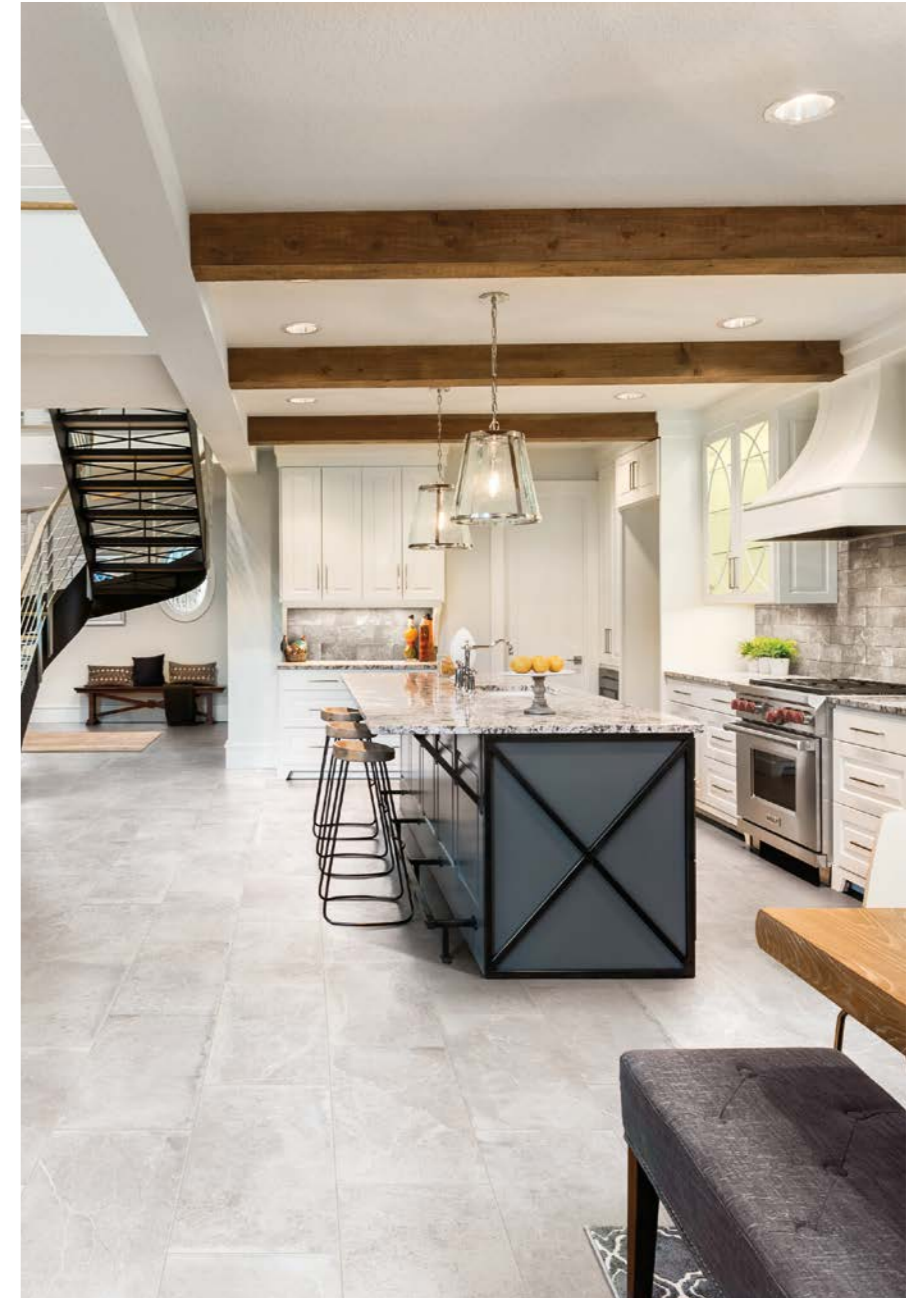



12"x24" / WHITE . 6"x12" / TAUPE



RUSTIC STONE / **TAUPE**

RUSTIC STONE



12"x12" / TAUPE . 6"x12" / WHITE





RUSTIC STONE / **GREY**

RUSTIC STONE



12"x24" / GREY








RUSTIC STONE / CHARCOAL

RUSTIC STONE



12"x24" / CHARCOAL . 6"x12" / GREY

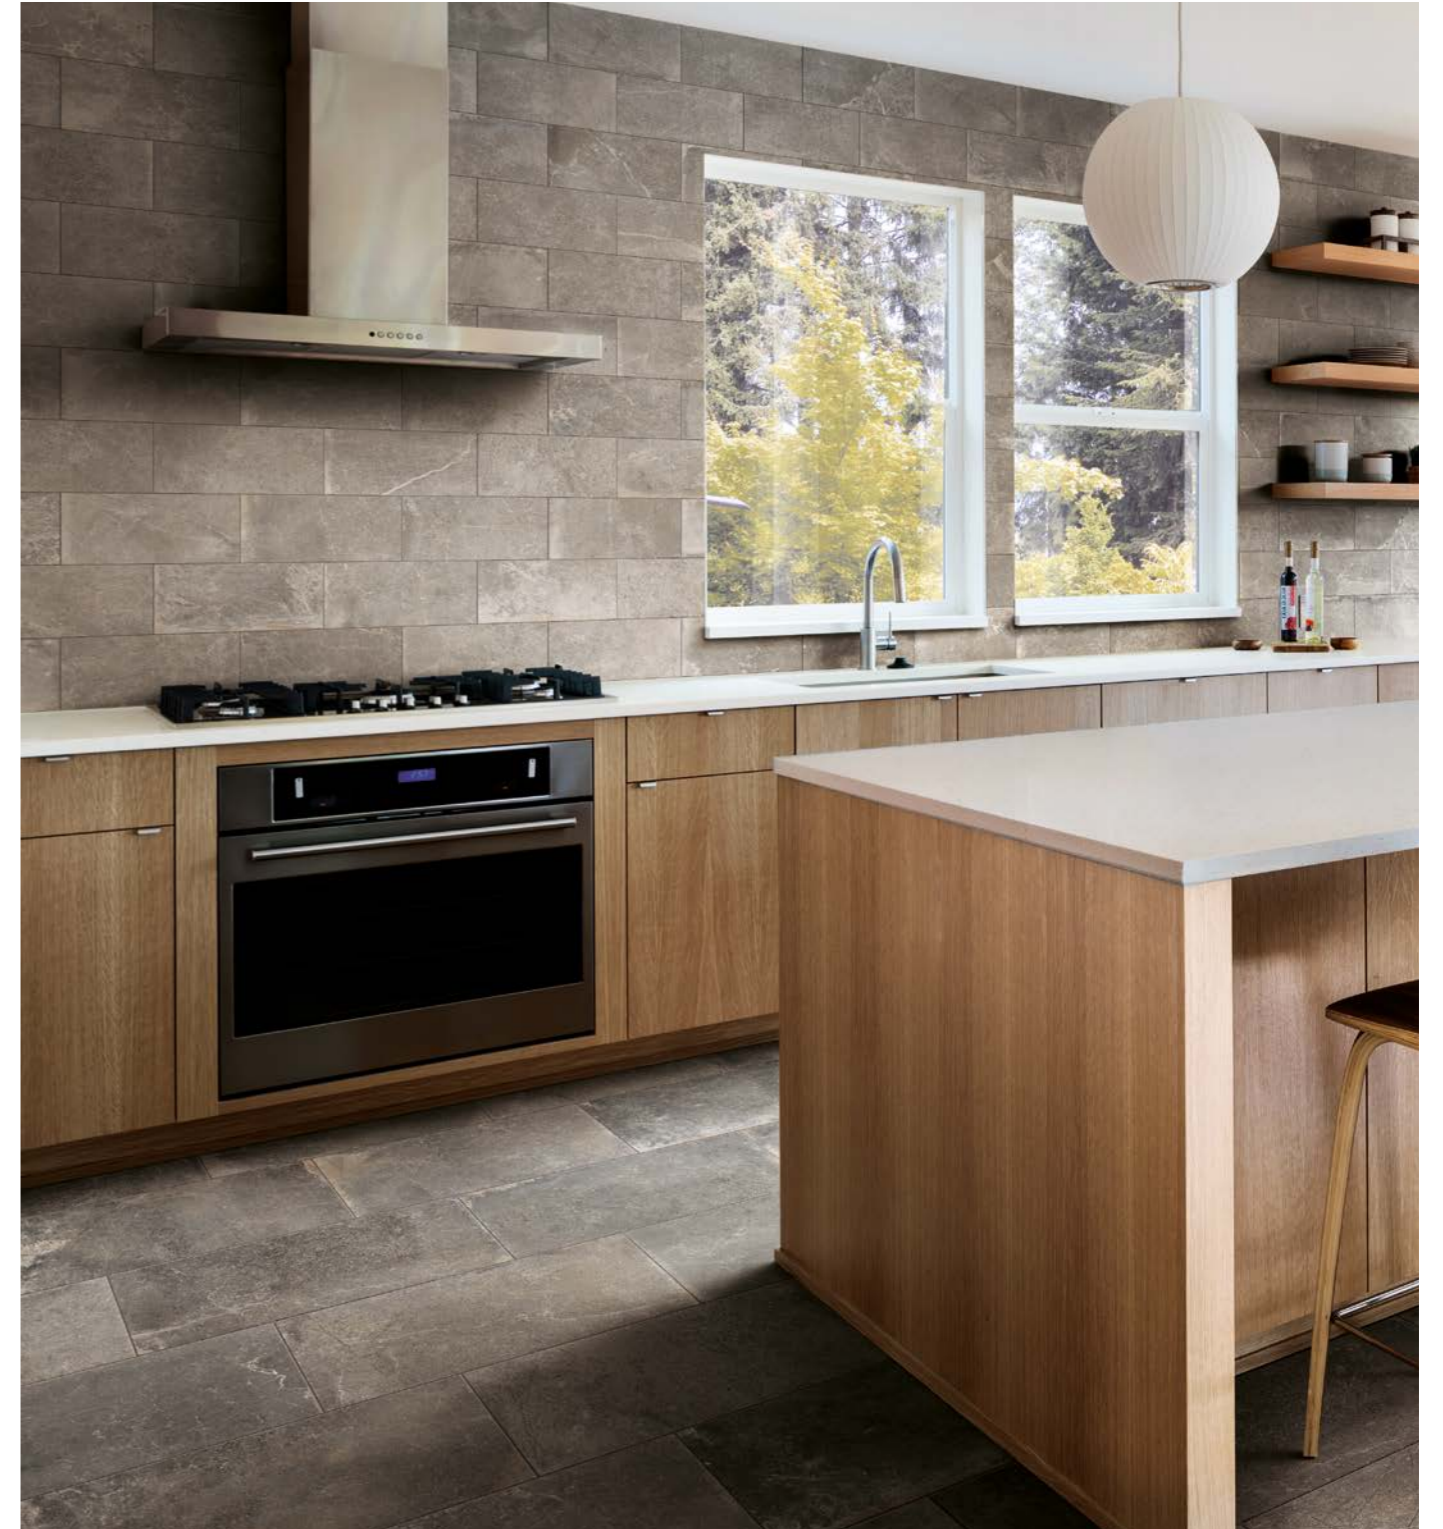





SIZES & SHADE VARIATION

sizes:


30

12"x24"
pressed



1102131 White
1102132 Taupe
1102133 Grey
1102134 Charcoal

12"x12"
pressed



1102157 White
1102158 Taupe
1102159 Grey
1102160 Charcoal

6"x12"
pressed




1102139 White
1102140 Taupe
1102141 Grey
1102142 Charcoal

Colors shown may vary from actual product. Final selection should be made from actual product samples.

mosaics & trim pieces:

12"x12"
Mosaic
(36 dot) 2"x2"




1102147 White
1102148 Taupe
1102149 Grey
1102150 Charcoal

3"x12" Bullnose




1102143 White
1102144 Taupe
1102145 Grey
1102146 Charcoal

31



V1

UNIFORM APPEARANCE
Differences among pieces from the same production run are minimal.



V2

SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern with similar colors.



V3

MODERATE VARIATION
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



V4















SUBSTANTIAL VARIATION
Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.



12"x12" / TAUPE . 6"x12" / WHITE











Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.
 Este producto cumple o excede todos los estandares de ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE [®] stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest [®]	ANSI A326.3	INDOOR ≥0.42 WET OUTDOOR >0.55 WET	≥0.42 WET >0.55 WET 2CM & GRIP	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Green Memberships & Accreditations

	DESCRIPTION
	Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.
	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
	Defines post-consumer content of as much as 3% recycled material which reduces landfill impact. Certified by Bureau Veritas.
	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint. Certified by Bureau Veritas.
	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.
	ISO 9001 & ISO 14001 are globally recognized standards. ISO 9001 certifies that Florim USA products and practices continually meet and exceed customer and regulatory requirements. ISO 14001 certifies that Florim USA complies with environmental regulations and that its manufacturing practices are environmentally conscious.
	Florim USA updated its corporate charter in 2022 to become a Benefit Corporation. Our company is committed to maintaining this designation through initiatives focused on sustainability, social responsibility, ethical business practices and transparent, annual reporting on our social and environmental performance.

Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE[®]stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE[®]stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality.



Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.

MADE IN THE USA



300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461

